


RKM Coupling

Material: HF
Colour: grey RAL 7035

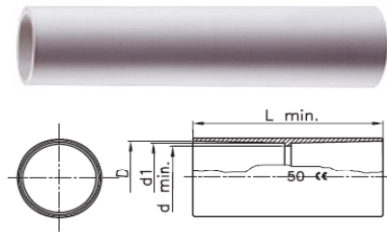


Part Number	Conduits Ø (mm)	D (mm)	d min. (mm)	d1 (mm)	L min. (mm)	Characteristics	Package (pcs/pack)
103840	16	16,2	14,5	16,0	80,0	halogen free	10
103851	20	20,2	17,8	19,7	81,0	halogen free	10
103862	25	25,3	23,1	24,9	81,0	halogen free	10
103873	32	32,3	29,5	31,7	102,0	halogen free	5
103884	40	40,3	37,4	39,7	111,5	halogen free	5
103895	50	50,3	46,7	49,7	122,0	halogen free	15
103906	63	63,3	60,0	62,7	130,0		8

RK15 Medium Rigid Conduit

Material: PVC
Colour: grey RAL 7035
Length: 3m

Application: electric systems and/or data transmission in all types of environment

Installation: Mainly exposed on walls and ceilings. Suitable for applications inside false ceilings and floating floors. Flush -mounted in floors, walls and/or ceilings.

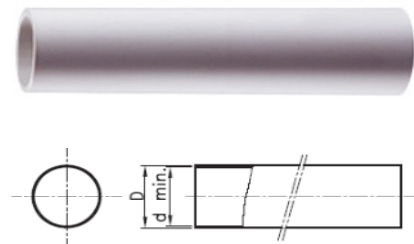

Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
103917	16	16,0	0 - 0,3	13,0	111
103928	20	20,0	0 - 0,3	16,9	57
103939	25	25,0	0 - 0,4	21,4	57
103950	32	32,0	0 - 0,4	27,8	30
103961	40	40,0	0 - 0,4	35,4	30
103972	50	50,0	0 - 0,5	44,3	15
103983	63	63,0	0 - 0,6	55,0	9

RKHF Heavy Rigid Conduit, Halogen-free


Material: halogen-free

Colour: grey RAL 7035

Length: 2m

Application: Electric systems and/or data transmission in all types of environment. Particularly suitable for installations in public places: schools, cinemas, theatres, trains, undergrounds.

Installation: Mainly exposed on walls and ceilings. Suitable for applications inside false ceilings and floating floors. Flush-mounted in floors, walls and/or ceilings.



Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
103994	16	16,0	0 - 0,3	10,8	60
104005	20	20,0	0 - 0,3	14,5	46
104016	25	25,0	0 - 0,4	19,3	48
104027	32	32,0	0 - 0,4	25,8	36
104038	40	40,0	0 - 0,4	32,8	30
104049	50	50,0	0 - 0,5	42,4	18
104060	63	63,0	0 - 0,6	54,6	12

ICTA Medium pliable conduit self-extinguishing & self-recovering



Material: halogen-free self-extinguishing polypropylene

Colour: grey RAL 7035 or dark grey

Length: depending on the diameter

Application: electrical systems and/or data transmission for all types of environment. Particularly suitable for installations in public places: schools, cinemas, theatres, undergrounds, etc.

Installation: Mainly flush-mounted in floors, walls and ceilings buried in concrete. Suitable for applications inside false ceilings and floating floors.

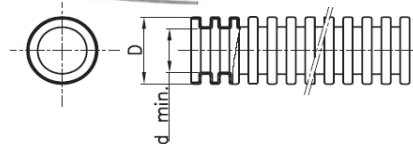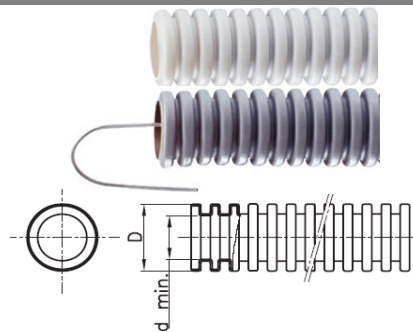

grey RAL 7035-without cable puller

Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
104071	16	16,0	0 - 0,3	10,7	100
104082	20	20,0	0 - 0,3	14,1	100
104093	25	25,0	0 - 0,4	18,3	50
104104	32	32,0	0 - 0,4	24,3	25
104115	40	40,0	0 - 0,4	31,2	25
104126	50	50,0	0 - 0,5	39,6	25
104137	63	63,0	0 - 0,6	50,6	20

(continue to next page)

ICTA Medium pliable conduit self-extinguishing & self-recovering

(continue from previous page)

grey RAL 7035-with cable puller

Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
104148	16	16,0	0 -0,3	10,7	100
104159	20	20,0	0 -0,3	14,1	100
104170	25	25,0	0 -0,4	18,3	50
104181	32	32,0	0 -0,4	24,3	25
104192	40	40,0	0 -0,4	31,2	25
104203	50	50,0	0 -0,5	39,6	25
104214	63	63,0	0 -0,6	50,6	20

dark grey-without cable puller

Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
104225	16	16,0	0 -0,3	10,7	100
104236	20	20,0	0 -0,3	14,1	100
104247	25	25,0	0 -0,4	18,3	50
104258	32	32,0	0 -0,4	24,3	25
104269	40	40,0	0 -0,4	31,2	25
104280	50	50,0	0 -0,5	39,6	25
104291	63	63,0	0 -0,6	50,6	20

dark grey-with cable puller

Part Number	Conduits Ø (mm)	D (mm)	(+/-)	d min. (mm)	Package (pcs/pack)
104302	16	16,0	0 -0,3	10,7	100
104313	20	20,0	0 -0,3	14,1	100
104324	25	25,0	0 -0,4	18,3	50
104335	32	32,0	0 -0,4	24,3	25
104346	40	40,0	0 -0,4	31,2	25
104357	50	50,0	0 -0,5	39,6	25
104368	63	63,0	0 -0,6	50,6	20