

DEK 5 GW MKD Terminal Markers,consistent digits,standard print

Material: polyamide

Dimensions (L X W): 5 x 5 mm


Pitch: 5 mm

Temperature,continuous: min. -40°C,max. 100°C

Orientation of print: horizontal

Flammability class: UL94-V2

Colour: white with black standard printing



Part Number	Part Designation	Marking	Package (pcs/pack)
127560	DEK 5 GW MKD 1	1	500
127571	DEK 5 GW MKD 2	2	500
127582	DEK 5 GW MKD 3	3	500
127593	DEK 5 GW MKD 4	4	500
127604	DEK 5 GW MKD 5	5	500
127615	DEK 5 GW MKD 6	6	500
127626	DEK 5 GW MKD 7	7	500
127637	DEK 5 GW MKD 8	8	500
127648	DEK 5 GW MKD 9	9	500
127659	DEK 5 GW MKD +	+	500
127670	DEK 5 GW MKD -	-	500
127681	DEK 5 GW MKD EARTH	EARTH	500

DEK 5 FSZ Terminal Markers continuous linear digits,standard print

Material: polyamide

Dimensions (L X W): 5 x 5 mm


Pitch: 5 mm

Temperature,continuous: min. -40°C,max. 100°C

Orientation of print: vertical

Flammability class: UL94-V2

Colour: white with black standard printing

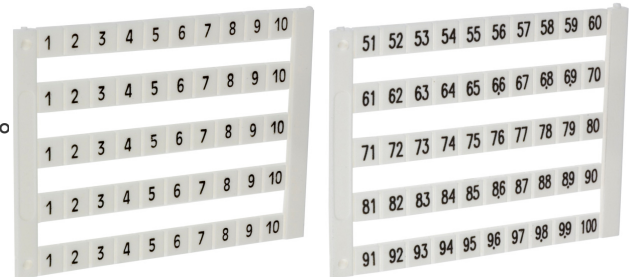

Part Number	Part Designation	Marking	Package (pcs/pack)
127692	DEK 5 FSZ 1-10	1-10	500
127703	DEK 5 FS 51-100	51-100	500

DEK 5 FWZ Terminal Markers continuous linear digits, standard print
Material: polyamide


Dimensions (L X W): 5 x 5 mm

Pitch: 5 mm

Temperature, continuous: min. -40°C, max. 100°C

Orientation of print: horizontal

Flammability class: UL94-V2

Colour: white with black standard printing


Part Number	Part Designation	Marking	Package (pcs/pack)
127614	DEK 5 FWZ 1 TO 10	1-10	500

CC...MC NEUTRAL WS Device Markers
Material: polyamide 66, halogen & cadmium free

Dimensions (L X W): 5 x 5 mm

Temperature, continuous: min. -40°C, max. 100°C

Flammability class: UL94-V2

Colour: white with neutral printing


Part Number	Part Designation	Dimensions (mm)			Package (pcs/pack)
		L	W	H	
127725	CC 15/17 MC NEUTRAL WS	17,0	15,0	0,8	80
127736	CC 15/27 MC NEUTRAL WS	27,0	15,0	0,8	80
127747	CC 15/49 MC NEUTRAL WS	49,0	15,0	1,2	40
127758	CC 15/60 MC NEUTRAL WS	60,0	15,0	1,2	40

CC-H Device Markers Clipcard Holder
Material: polyamide 66, halogen & cadmium free

Dimensions (L X W): 5 x 5 mm

Temperature, continuous: min. -40°C, max. 100°C

Flammability class: UL94-V2

Colour: black


Part Number	Part Designation	Dimensions (mm)			Package (pcs/pack)
		L	W	H	
127769	CC-H 15/17	17,0	15,0	5,5	75
127780	CC-H 15/27	27,0	15,0	5,5	45
127791	CC-H 15/49	49,0	15,0	5,5	25
127802	CC-H 15/60	60,0	15,0	5,5	25