

WDU Modular feed-through terminals, screw connection

Insulation material: Wemid



Open sides: right

Operating temperature range: -50°C to 120°C

Mounting: snap-on

Flammability class: UL94-V0


Connection direction: on side

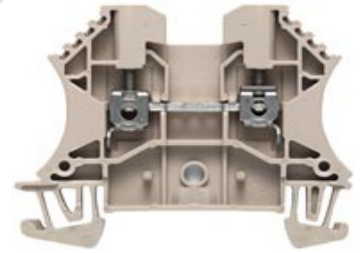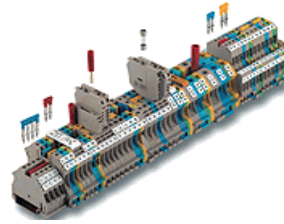

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
125844	WDU 2.5	800	24	2,5	60,0	5.1	47,0	dark beige	100
125855	WDU 2.5 BL	800	24	2,5	60,0	5.1	47,0	blue	100
125866	WDU 2.5 GN	800	24	2,5	60,0	5.1	47,0	green	100
125877	WDU 2.5 SW	800	24	2,5	60,0	5.1	47,0	black	100
125888	WDU 2.5 GE	800	24	2,5	60,0	5.1	47,0	yellow	100
125899	WDU 2.5 GR	800	24	2,5	60,0	5.1	47,0	grey	100
125910	WDU 2.5 WS	800	24	2,5	60,0	5.1	47,0	white	100
125921	WDU 4	800	32	4,0	60,0	6.1	47,0	dark beige	100
125932	WDU 4 BL	800	32	4,0	60,0	6.1	47,0	blue	100
125943	WDU 4 BR	800	32	4,0	60,0	6.1	47,0	brown	100
125954	WDU 4 GE	800	32	4,0	60,0	6.1	47,0	yellow	100
125965	WDU 4 GN	800	32	4,0	60,0	6.1	47,0	green	100
125976	WDU 4 GR	800	32	4,0	60,0	6.1	47,0	grey	100
125987	WDU 4 OR	800	32	4,0	60,0	6.1	47,0	orange	100
125998	WDU 4 RT	800	32	4,0	60,0	6.1	47,0	red	100
126009	WDU 4 SW	800	32	4,0	60,0	6.1	47,0	black	100
126020	WDU 4 WS	800	32	4,0	60,0	6.1	47,0	white	100
126031	WDU 6	800	41	6,0	60,0	7,9	47,0	dark beige	100
126042	WDU 6 BL	800	41	6,0	60,0	7,9	47,0	blue	100
126053	WDU 6 OR	800	41	6,0	60,0	7,9	47,0	orange	100
126064	WDU 6 RT	800	41	6,0	60,0	7,9	47,0	red	100
126075	WDU 6 SW	800	41	6,0	60,0	7,9	47,0	black	100
126086	WDU 10	1000	57	10,0	60,0	9,9	47,0	dark beige	50
126097	WDU 10 BL	1000	57	10,0	60,0	9,9	47,0	blue	50
126108	WDU 16	1000	76	16,0	60,0	11,9	63,0	dark beige	50
126119	WDU 16 BL	1000	76	16,0	60,0	11,9	63,0	blue	50
126130	WDU 35	1000	125	35,0	60,0	16,0	63,0	dark beige	40
126141	WDU 35 BL	1000	125	35,0	60,0	16,0	63,0	blue	40

ZDU Modular feed-through terminals
 standard form, tension clamp connection

Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: top

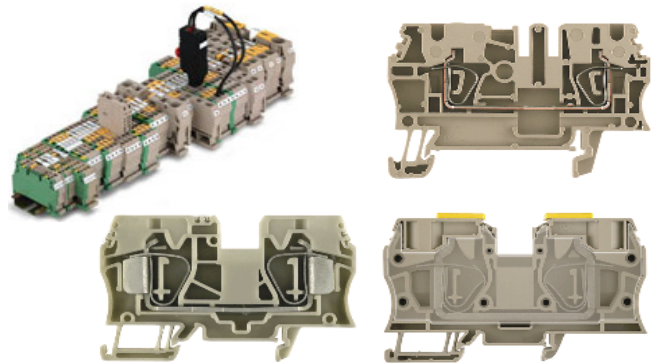

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126152	ZDU 2.5	800	24	2,5	59,5	5,1	39,5	dark beige	100
126163	ZDU 2.5 BL	800	24	2,5	59,5	5,1	39,5	blue	100
126174	ZDU 2.5 GE	800	24	2,5	59,5	5,1	39,5	yellow	100
126185	ZDU 2.5 GN	800	24	2,5	59,5	5,1	39,5	green	100
126196	ZDU 2.5 GR	800	24	2,5	59,5	5,1	39,5	grey	100
126207	ZDU 2.5 OR	800	24	2,5	59,5	5,1	39,5	orange	100
126218	ZDU 2.5 RT	800	24	2,5	59,5	5,1	39,5	orange	100
126229	ZDU 2.5 SW	800	24	2,5	59,5	5,1	39,5	black	100
126240	ZDU 2.5 WS	800	24	2,5	59,5	5,1	39,5	white	100
126251	ZDU 4	800	32	4,0	62,0	6,1	43,5	dark beige	100
126262	ZDU 4 BL	800	32	4,0	62,0	6,1	43,5	blue	100
126273	ZDU 4 GE	800	32	4,0	62,0	6,1	43,5	yellow	100
126284	ZDU 4 GR	800	32	4,0	62,0	6,1	43,5	grey	100
126295	ZDU 4 OR	800	32	4,0	62,0	6,1	43,5	orange	100
126306	ZDU 4 RT	800	32	4,0	62,0	6,1	43,5	red	100
126317	ZDU 4 SW	800	32	4,0	62,0	6,1	43,5	black	100
126328	ZDU 4 WS	800	32	4,0	62,0	6,1	43,5	white	100
126339	ZDU 6	800	41	6,0	65,0	8,1	45,6	dark beige	50
126350	ZDU 6 BL	800	41	6,0	65,0	8,1	45,6	blue	50
126361	ZDU 6 OR	800	41	6,0	65,0	8,1	45,6	orange	50
126372	ZDU 10	800	57	10,0	73,5	10,1	50,5	dark beige	25
126383	ZDU 10 BL	800	57	10,0	73,5	10,1	50,5	blue	25
126394	ZDU 16	1000	76	16,0	82,5	12,1	51,5	dark beige	25
126405	ZDU 16 BL	1000	76	16,0	82,5	12,1	51,5	blue	25
126416	ZDU 35	800	125	35,0	100,5	16,0	59,0	dark beige	10
126427	ZDU 35 BL	800	125	35,0	100,5	16,0	59,0	blue	10

WDU...N Modular feed-through terminals, screw connection, compact size

Insulation material: Wemid


Open sides: right

Operating temperature range: -50°C to 120°C

Mounting: snap-on

Flammability class: UL94-V0

Connection direction: on side

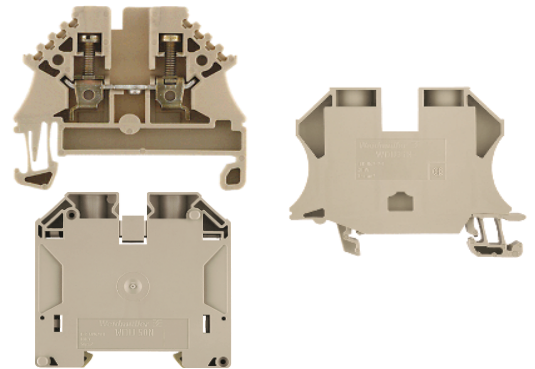

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126438	WDU 2.5N	500	24	2,5	44,0	5,1	37,5	dark beige	100
126449	WDU 2.5N BL	500	24	2,5	44,0	5,1	37,5	blue	100
126460	WDU 4N	500	32	4,0	44,0	6,1	38,5	dark beige	100
126471	WDU 4N BL	500	32	4,0	44,0	6,1	38,5	blue	100
126482	WDU 35N	500	125	35,0	66,0	16,0	51,0	dark beige	20
126493	WDU 35N BL	500	125	35,0	66,0	16,0	51,0	blue	20
126504	WDU 50N	1000	150	50,0	70,0	18,5	70,0	dark beige	10
126515	WDU 50N BL	1000	150	50,0	70,0	18,5	70,0	blue	10

WPE Modular PE earth terminals ,screw connection

Insulation material: Wemid, green-yellow colour


Open sides: right

Operating temperature range: -50°C to 120°C

Mounting: screwed

Flammability class: UL94-V0


Connection direction: top

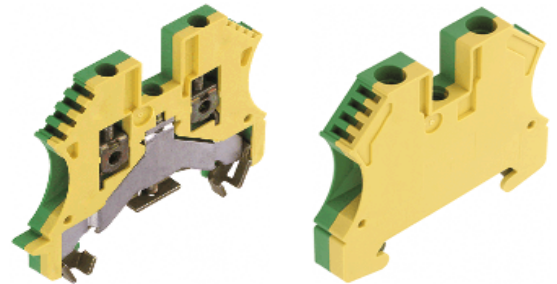

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126526	WPE 2.5	800		2,5	60,0	5.1	47	GR/YEL	100
126537	WPE 4	800		4,0	56,0	6,1	47	GR/YEL	100
126548	WPE 6	800		6,0	56,0	7,9	47	GR/YEL	50
126559	WPE 10	1000		10,0	56,0	9,9	47	GR/YEL	50
126570	WPE 16	1000		16,0	56,0	11,9	63	GR/YEL	50
126581	WPE 35	800		35,0	56,0	16,0	63	GR/YEL	25

ZDU../4AN Modular feed-through terminals
 standard form, tension clamp connection


Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: top

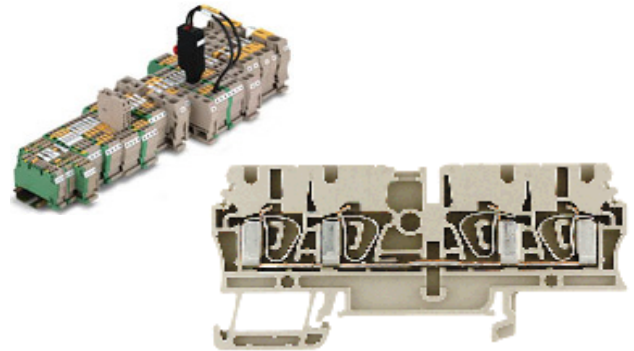

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126592	ZDU 2.5/4AN	800	24	2,5	79,5	5,1	39,5	dark beige	100
126603	ZDU 2.5/4AN BL	800	24	2,5	79,5	5,1	39,5	blue	100
126614	ZDU 2.5/4AN GN	800	24	2,5	79,5	5,1	39,5	green	100
126625	ZDU 2.5/4AN GR	800	24	2,5	79,5	5,1	39,5	grey	100
126636	ZDU 2.5/4AN OR	800	24	2,5	79,5	5,1	39,5	orange	100
126647	ZDU 2.5/4AN RT	800	24	2,5	79,5	5,1	39,5	red	100
126658	ZDU 2.5/4AN SW	800	24	2,5	79,5	5,1	39,5	black	100
126669	ZDU 2.5/4AN WS	800	24	2,5	79,5	5,1	39,5	white	100
126680	ZDU 4/4AN	800	32	4,0	104,5	6,1	43,5	dark beige	50
126691	ZDU 4/4AN BL	800	32	4,0	104,5	6,1	43,5	blue	50

ZDU..-2/4AN Modular feed-through terminals
 roof-style, tension clamp connection


Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: inclined / angled

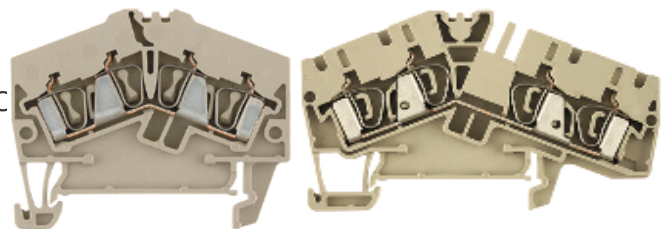

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126702	ZDU 2.5-2/4AN	800	24	2,5	50,5	5,1	44,0	dark beige	100
126713	ZDU 2.5-2/4AN BL	800	24	2,5	50,5	5,1	44,0	blue	100
126724	ZDU 2.5-2/4AN OR	800	24	2,5	50,5	5,1	44,0	orange	100
126735	ZDU 4-2/4AN	800	32	4,0	75,1	6,1	46,0	dark beige	100
126746	ZDU 4-2/4AN BL	800	32	4,0	75,1	6,1	46,0	blue	100

WDU../ZA Modular feed-through terminals, screw connection


Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: on side

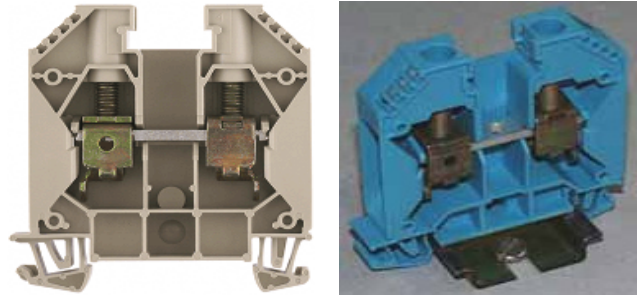

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126757	WDU 16/ZA	1000	76	16,0	60,0	11,9	63,0	dark beige	50
126768	WDU 16/ZA BL	1000	76	16,0	60,0	11,9	63,0	blue	50
126779	WDU 35/ZA	1000	125	35,0	60,0	16,0	63,0	dark beige	40
126790	WDU 35/ZA BL	1000	125	35,0	60,0	16,0	63,0	blue	40

ZPE..-2/4AN Modular PE earth terminals
 roof-style, tension clamp connection


Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: inclined / angled

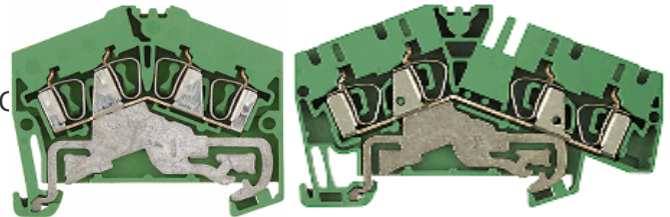

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126801	ZPE 2.5 2/4AN	800		2,5	50,5	5,1	44,0	green/yellow	100
126812	ZPE 4 2/4AN	800		4,0	75,0	6,1	46,0	green/yellow	100

WDK 2-tier modular terminals, standard form, screw connection

Insulation material: Wemid
Open sides: right
Operating temperature range: -50°C to 120°C
Mounting: snap-on
Flammability class: UL94-V0
Connection direction: on side

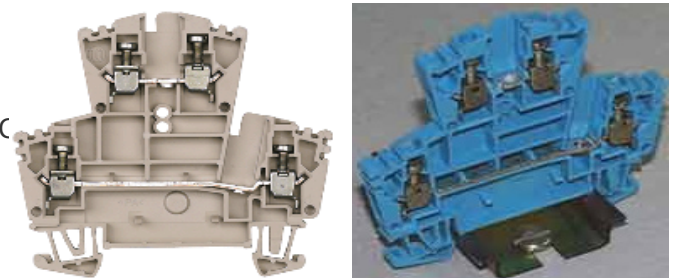

Part Number	Part Designation	Rated Voltage (V)	Rated Current (A)	Cross-section (mm ²)	Dimensions (mm)			Colour	Pack. (pcs/pack)
					L	W	H		
126823	WDK 2.5	400	24	2,5	69,0	5,1	63,0	dark beige	100
126834	WDK 2.5 BL	400	24	2,5	69,0	5,1	63,0	blue	100

WAP 2.5-10 End plates for modular terminals

Material: Wemid

Flammability class: UL94-V0

Not Snap-on



Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
126845	WAP 2.5-10	56	1,5	33,5	dark beige	50
126856	WAP 2,5-10 BL	56	1,5	33,5	blue	50
126867	WAP 2,5-10 BR	56	1,5	33,5	brown	50
126878	WAP 2,5-10 GE	56	1,5	33,5	yellow	50
126889	WAP 2,5-10 GN	56	1,5	33,5	green	50
126900	WAP 2,5-10 GR	56	1,5	33,5	grey	50
126911	WAP 2,5-10 OR	56	1,5	33,5	orange	50
126922	WAP 2,5-10 RT	56	1,5	33,5	red	50
126933	WAP 2,5-10 SW	56	1,5	33,5	black	50
126944	WAP 2,5-10 VI	56	1,5	33,5	violet	50
126955	WAP 2,5-10 WS	56	1,5	33,5	white	50

WAP WDK2.5 End plates for modular terminals

Material: Wemid

Flammability class: UL94-V0

Not Snap-on



Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
126966	WAP WDK2.5	69	1,5	54,5	dark beige	20
126977	WAP WDK2.5 BL	69	1,5	54,5	blue	20
126988	WAP WDK2.5 GN	69	1,5	54,5	green	20

WAP WDU2.5N/4N End plates for modular terminals

Material: Wemid

Flammability class: UL94-V

Not Snap-on



Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
126999	WAP WDU2.5N/4N	44	1,5	29,7	dark beige	50
127010	WAP WDU2.5N/4N BL	44	1,5	29,7	blue	50
127021	WAP WDU2.5N/4N GE	44	1,5	29,7	yellow	50
127032	WAP WDU2.5N/4N OR	44	1,5	29,7	orange	50

ZAP/TW End & Partition plates for modular terminals

Material: Wemid

Flammability class: UL94-V0

Snap-on



Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
127043	ZAP/TW 1	59,5	2,0	30,5	dark beige	50
127054	ZAP/TW 1 BL	59,5	2,0	30,5	blue	50
127065	ZAP/TW 1 GN	59,5	2,0	30,5	green	50
127076	ZAP/TW 1 GR	59,5	2,0	30,5	grey	50
127087	ZAP/TW 1 OR	59,5	2,0	30,5	orange	50
127098	ZAP/TW 1 RT	59,5	2,0	30,5	red	50
127109	ZAP/TW 2	66,0	2,0	30,5	dark beige	50
127120	ZAP/TW 2 BL	66,0	2,0	30,5	blue	50
127131	ZAP/TW 2 GN	66,0	2,0	30,5	green	50
127142	ZAP/TW 2 OR	66,0	2,0	30,5	orange	50
127153	ZAP/TW 3	79,4	2,0	30,5	dark beige	50
127164	ZAP/TW 3 BL	79,4	2,0	30,5	blue	50
127175	ZAP/TW 3 GN	79,4	2,0	30,5	green	50
127186	ZAP/TW 3 GR	79,4	2,0	30,5	grey	50
127197	ZAP/TW 3 OR	79,4	2,0	30,5	orange	50
127208	ZAP/TW 3 RT	79,4	2,0	30,5	red	50
127219	ZAP/TW 3 WS	79,4	2,0	30,5	white	50
127230	ZAP/TW 3 SW	79,4	2,0	30,5	black	50
127241	ZAP/TW 4	62,0	2,0	34,8	dark beige	50
127252	ZAP/TW 4 BL	62,0	2,0	34,8	blue	50
127263	ZAP/TW 4 GN	62,0	2,0	34,8	green	50
127274	ZAP/TW 4 OR	62,0	2,0	34,8	orange	50
127285	ZAP/TW 5	65,0	2,0	37,0	dark beige	50
127296	ZAP/TW 5 BL	65,0	2,0	37,0	blue	50
127307	ZAP/TW 7	50,5	2,5	36,2	dark beige	50
127318	ZAP/TW 7 BL	50,5	2,5	36,2	blue	50
127329	ZAP/TW 7 OR	50,5	2,5	36,2	orange	50

ZAP/TW ZDU End & Partition plates for modular terminals

Material: Wemid

Flammability class: UL94-V0


Snap-on



Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
127340	ZAP/TW ZDU10	74,0	2,7	42,8	dark beige	20
127351	ZAP/TW ZDU10 BL	74,0	2,7	42,8	blue	20
127362	ZAP/TW ZDU16	82,2	3,0	43,4	dark beige	20
127373	ZAP/TW ZDU16 BL	82,2	3,0	43,4	blue	20

WEW Rail Support brackets for modular terminals


Part Number	Part Designation	Dimensions (mm)			Colour	Package (pcs/pack)
		L	W	H		
127384	WEW 35/1	56,0	12,0	63,0	dark beige	50
127395	WEW 35/2	56,0	8,0	63,0	dark beige	50
127406	WEW 32/1	56,0	12,0	70,0	dark beige	50

TS35 Mounting Rails for modular terminals


Part Number	Part Designation	Short-circuit strength (mm ²)	Dimensions (mm)			Material
			H	Thickness	L	
127417	TS 35X7.5/LL 2M/ST/SZ	16	7,5	1,0	2,0	steel,galvanized finish
127428	TS 35X7.5 2M/AL/BK	35	7,5	1,0	2,0	aluminium,untreated
127439	TS 35X7.5 2M/CRN	16	7,5	1,0	2,0	stainless steel,untreated
127450	TS 35X7.5 2M/ST/ZN	16	7,5	1,0	2,0	steel,galvanized finish
127461	TS 35X7.5/LL 1M/ST/ZN	16	7,5	1,0	10,0	steel,galvanized finish
127472	TS 35X7.5/LL 2M/ST/ZN	16	7,5	1,0	2,0	steel,galvanized finish
127483	TS 35X15/LL 2M/ST/SZ	25	15,0	1,5	2,0	steel,galvanized finish
127494	TS 35X15/LL 2M/ST/ZN	25	15,0	1,5	2,0	steel,galvanized finish
127505	TS 35X15/LL 1M/ST/ZN	25	15,0	1,5	10,0	steel,galvanized finish
127516	TS 35X15 2M/ST/ZN	25	15,0	1,5	2,0	steel,galvanized finish
127527	TS 35X15/2.3 2M/AL/BK		15,0	2,3	2,0	aluminium,untreated
127538	TS 35X15/2.3 2M/CU/BK	150	15,0	2,3	2,0	copper,untreated
127549	TS 35X15/2.3 2M/ST/ZN	50	15,0	2,3	2,0	steel,galvanized finish