


RFA-HF

250 V

Screened pair instrumentation and communication cable

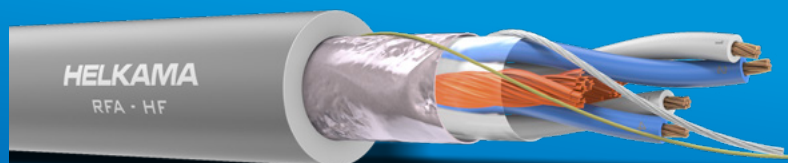

- Flame-retardant • Halogen-free • Low smoke emission • Oil resistant (SHF2 only)

CONDUCTOR	Stranded copper conductor, IEC 60228 Class 2
INSULATION	XLPE
TWISTED PAIR	Two insulated cores twisted together to form a pair
CABLING	Cabling, pairs twisted together, with optional fillers to obtain symmetrical and round construction, covered by separator tape.
COLLECTIVE SCREEN	Tinned copper drain wire (all sizes) Aluminium polyester tape, coverage 100%
SHEATH	Polyolefine SHF1, IEC 60092-360 Thermosetting polyolefine SHF2 on request Standard colour grey, other colours on request
REFERENCE STANDARD	IEC 60092-376

APPLICATION

Screened pair instrumentation and communication cable. For fixed installation in most areas, and on open deck in ships and offshore units, especially when lightweight cables are needed. If the cable is exposed to direct sunlight, protective covering or cable with black outer sheath is recommended.

PHYSICAL PROPERTIES:

CORE IDENTIFICATION	Pair colours white and blue Pair identification with colour code and identification number
MARINE TYPE APPROVALS	ABS, BV, CCS, CRS, DNV, KR, LR, RINA

MAIN CHARACTERISTICS:

RATED VOLTAGE	150/250 V (300 V)
FIRE PERFORMANCE	IEC 60332-1-2 IEC 60332-3-22
HALOGEN-FREE	IEC 60754 series
SMOKE EMISSION	IEC 61034 series
OIL RESISTANCE (SHF2 only)	IEC 60811-404 conditions according to 60092-360/SHF2
MIN. INSTALLATION TEMPERATURE	-15 °C
OPERATING TEMPERATURE	-40 - 80 °C fixed installation
MAXIMUM CONDUCTOR TEMPERATURE	90 °C

Subject to change without prior notice. See latest update on our webpage.

© 2022 Helkama Bica Oy. All rights reserved.

ELECTRICAL PROPERTIES:

	0.5 mm ²	0.75 mm ²	1.5 mm ²	Unit
Loop resistance (pair, max 20 °C)	80	52	24.4	ohm/km
Pair capacitance (nom. 1 KHz)	55	50	60	nF/km
Loop inductance (nom.)	0.6	0.6	0.7	mH/km
Insulation resistance (20 °C)	≥ 1500	≥ 1500	≥ 1500	Mohm/km

RFA-HF 250 V

Part number	No. of conductors x Conductor area (mm ²)	Nominal outer Ø (mm)	Weight kg/km	Min. bending radius mm (fi xed)
20910	1 x 2 x 0.5	5.5	40	45
20904	1 x 3 x 0.5	6.0	50	50
20912	2 x 2 x 0.5 Quad	6.5	60	50
20914	2 x 2 x 0.5	8.0	70	65
20906	3 x 2 x 0.5	8.5	85	70
20916	4 x 2 x 0.5	9.5	110	80
20918	7 x 2 x 0.5	11.5	155	90
20920	8 x 2 x 0.5	12.5	180	100
20922	10 x 2 x 0.5	14.0	215	110
20924	12 x 2 x 0.5	14.5	245	115
20926	14 x 2 x 0.5	15.5	280	125
20928	16 x 2 x 0.5	16.5	310	130
20930	19 x 2 x 0.5	17.5	360	140
20932	24 x 2 x 0.5	19.5	440	160
20934	32 x 2 x 0.5	22.5	580	180
20936	37 x 2 x 0.5	24.0	655	195
20970	1 x 2 x 0.75	6.5	55	50
20966	1 x 3 x 0.75	7.0	65	55
20972	2 x 2 x 0.75 Quad	7.5	75	60
20974	2 x 2 x 0.75	10.0	100	80
20968	3 x 2 x 0.75	10.5	120	85
20976	4 x 2 x 0.75	11.5	145	90
20978	7 x 2 x 0.75	14.0	220	110
20980	8 x 2 x 0.75	15.0	250	120
20982	10 x 2 x 0.75	16.5	300	135
20984	12 x 2 x 0.75	17.5	345	140
20986	14 x 2 x 0.75	19.0	400	150
20988	16 x 2 x 0.75	20.0	445	160
20990	19 x 2 x 0.75	22.0	530	175
20992	24 x 2 x 0.75	24.0	655	195
20994	32 x 2 x 0.75	27.5	845	220
20996	37 x 2 x 0.75	29.5	955	235
21356	1 x 2 x 1.5	8.0	80	65
21357	1 x 3 x 1.5	8.5	100	65
21358	2 x 2 x 1.5 Quad	9.5	130	75
21359	2 x 2 x 1.5	12.5	170	100
21360	3 x 2 x 1.5	13.5	200	105
21361	4 x 2 x 1.5	14.5	245	115
21362	7 x 2 x 1.5	17.5	385	140
21363	8 x 2 x 1.5	19.0	440	150
21364	10 x 2 x 1.5	22.0	555	175
21365	12 x 2 x 1.5	23.0	640	185
21366	14 x 2 x 1.5	24.5	735	195
21367	16 x 2 x 1.5	26.0	825	210
21368	19 x 2 x 1.5	28.0	970	225
21369	24 x 2 x 1.5	31.5	1210	255
21370	27 x 2 x 1.5	33.5	1355	270

Standard length 1000 m

SHF2 on request. Part number for SHF2 cables 4 + code from above table → 4xxxxx

Other sizes on request.